

# Installation Instructions for Yamaha Bolt Sissy



## Bars:

### Parts:

i. Sissy Bar	
ii. Socket Head Bolt - 8mm x 65mm, Pitch = 1.25	x4
iii. 8mm Spacer	x4
iv. 8mm Washer	x4
v. 8mm Plastic Washer	x4

### Tip:

- i. Install clear tape between the fender and the sissy bar to prevent scratching.
- ii. We recommend you use blue loctite to install bolts for added safety.

### Instructions:

#### Step 1

Clean your fender to prevent debris from getting stuck between the fender strut and sissy bar mounts.

#### Step 2


Remove all 4 fender strut bolts (2 from each side).

#### Step 3

Hold the sissy bar so that the holes in sissy bar mounts align with the fender holes on your bike. See Figure A.

#### Step 4

With the holes aligned, insert the included plastic washers and mounting bolts through the sissy bar mounting holes, then through the fender holes.

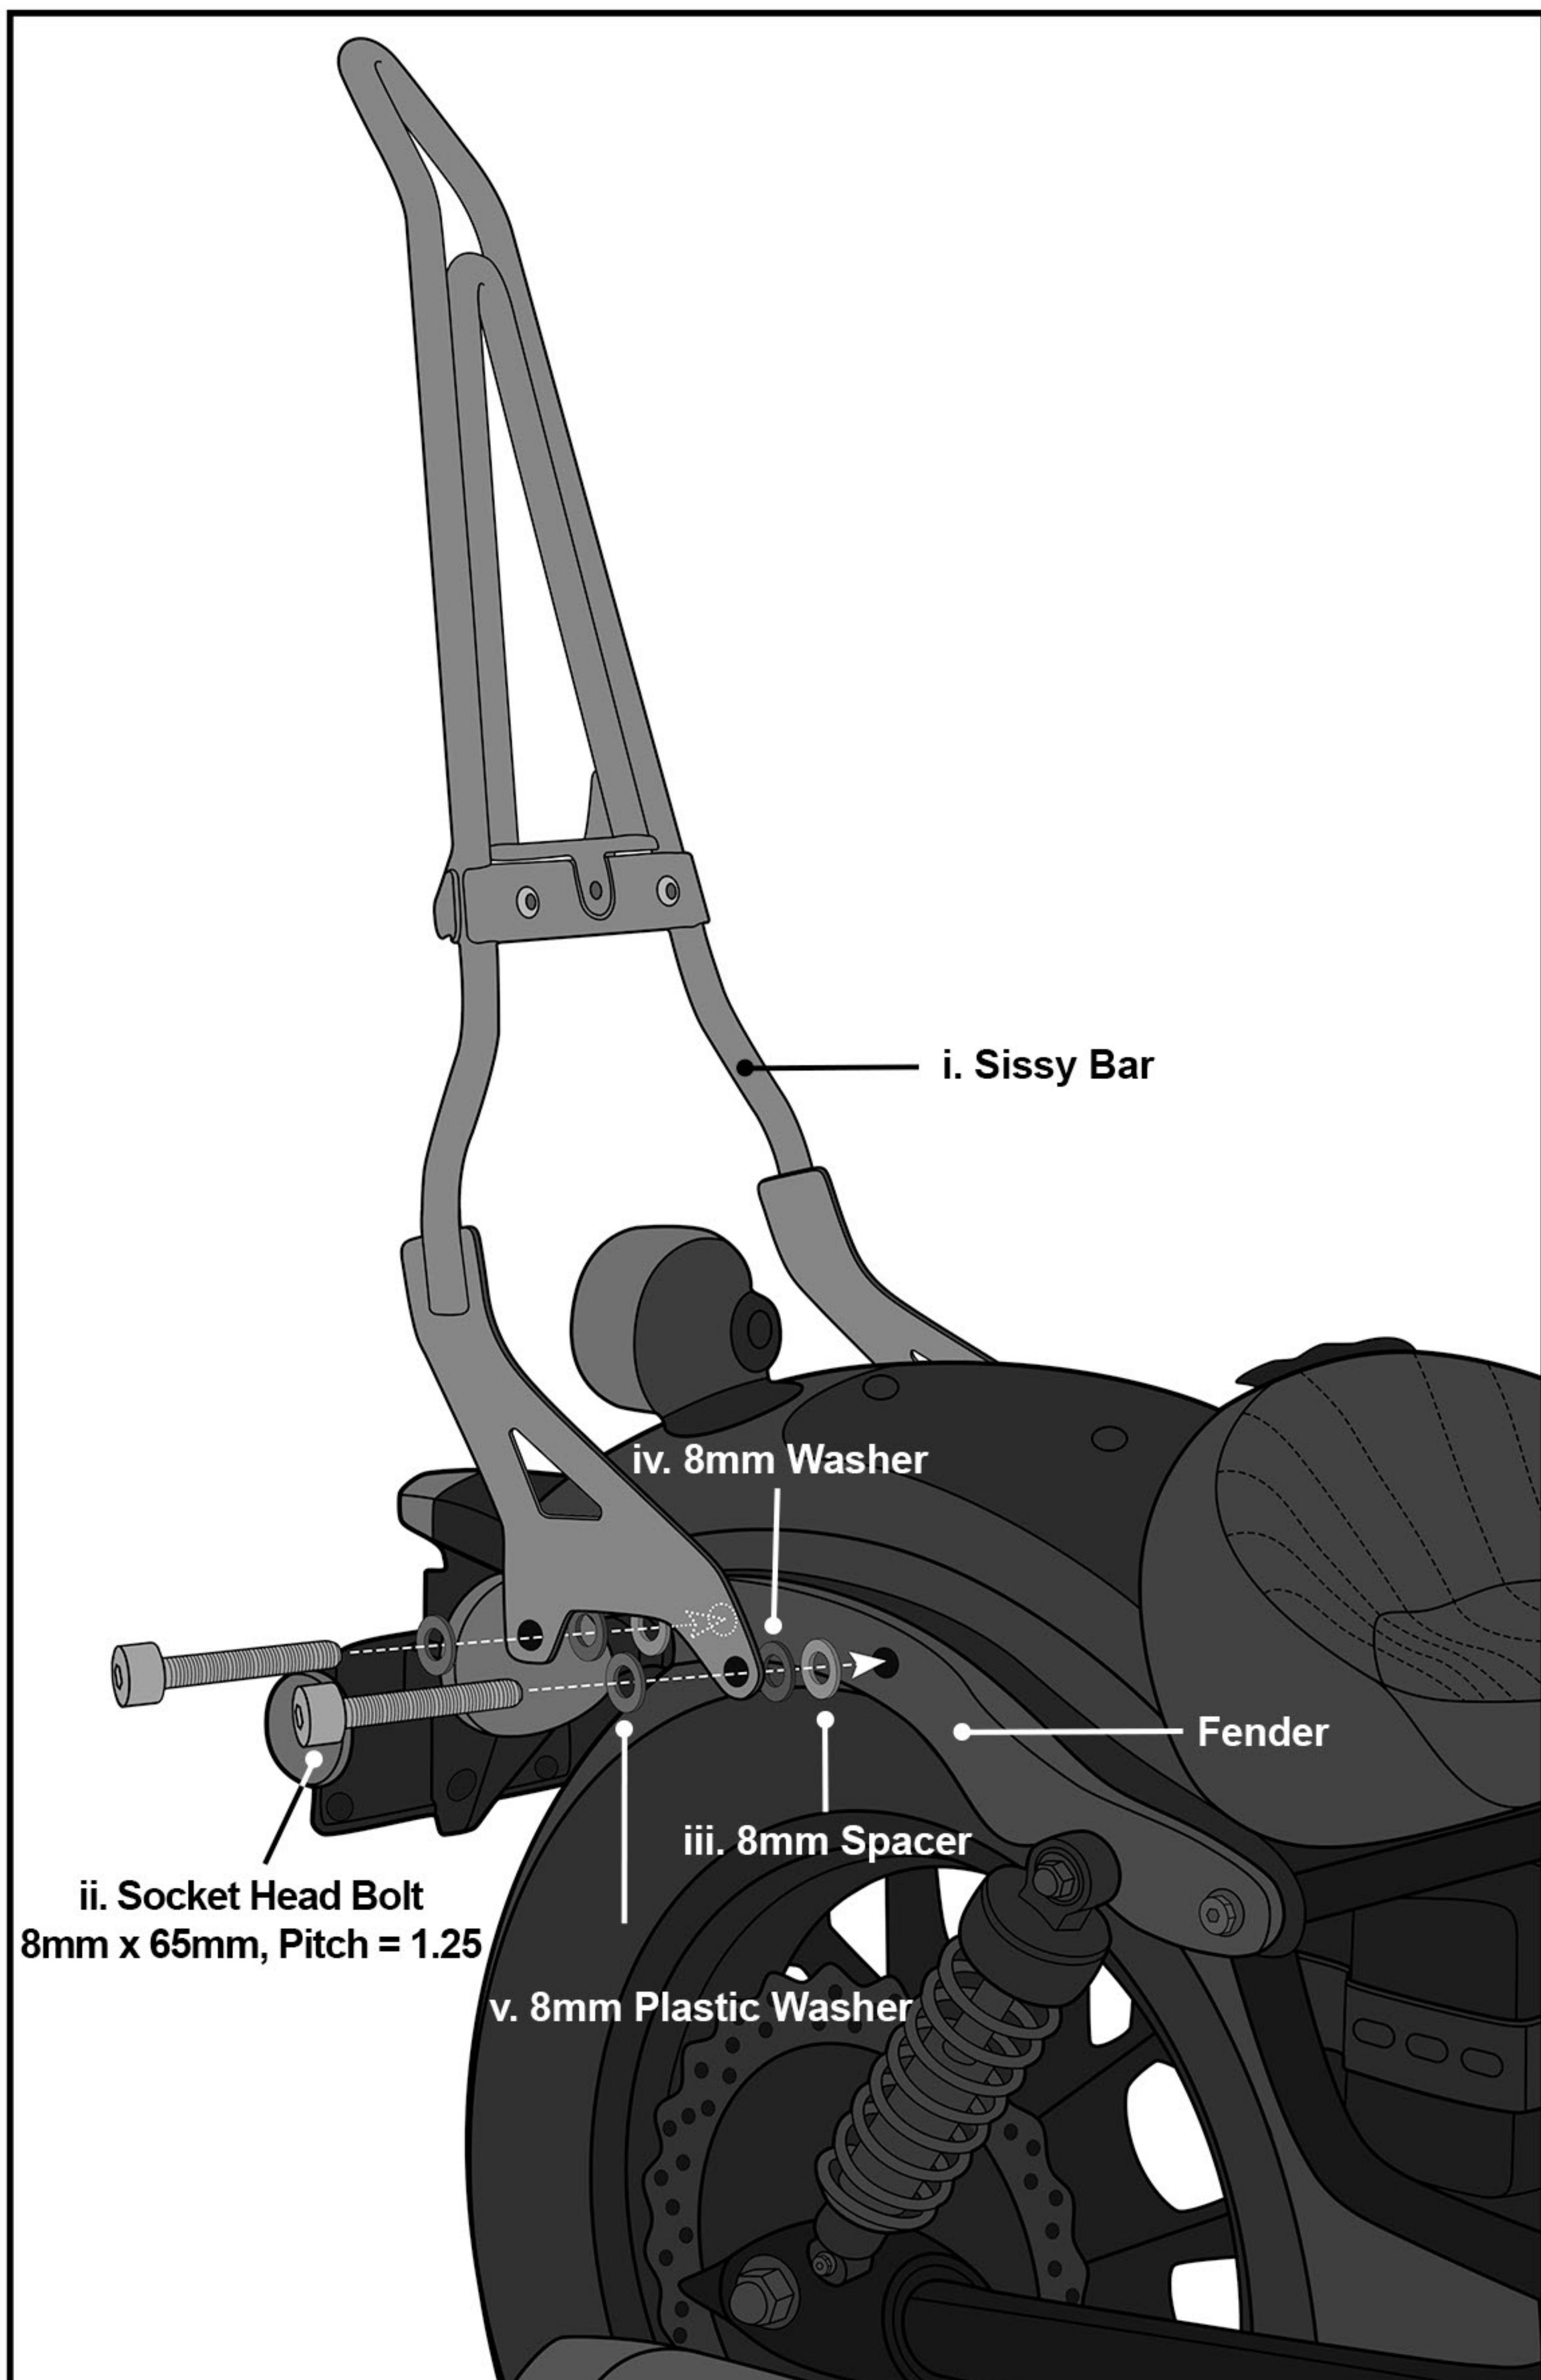

(Fig A) Sissy Bar Installed on Bike

## Step 5

Tighten all 4 bolts.

### Warnings !

- Do not install if you are confused about any of the installation steps.
- Regularly check bolts to ensure they are firmly in place.
- Viking Bags is not responsible for any damage or injury caused by improper use of any of the products.
- We recommend you consult a certified mechanic before installation.

Last Update: 28 January, 2025