

Installation Instructions for Honda Rebel 1100



Sissy Bars:

Parts:

i. Sissy Bar	
ii. Socket Head Bolt - M8 x 35mm	x2
iii. Socket Head Bolt - M8 x 30mm	x2
iv. Plastic washers	x4

Tip:

- i. Install clear tape between the fender and the sissy bar to prevent scratching.
- ii. We recommend you use blue loctite to install bolts for added safety.

Instructions:

Step 1

Clean your fender to prevent debris from getting stuck between the fender strut and sissy bar mounts.

Step 2


Remove all 4 fender strut bolts (2 from each side).

Step 3

Hold the sissy bar so that the holes in sissy bar mounts align with the fender holes on your bike. See Figure A.

Step 4

With the holes aligned, insert the included plastic washers and mounting bolts through the sissy bar mounting holes, then through the fender holes.

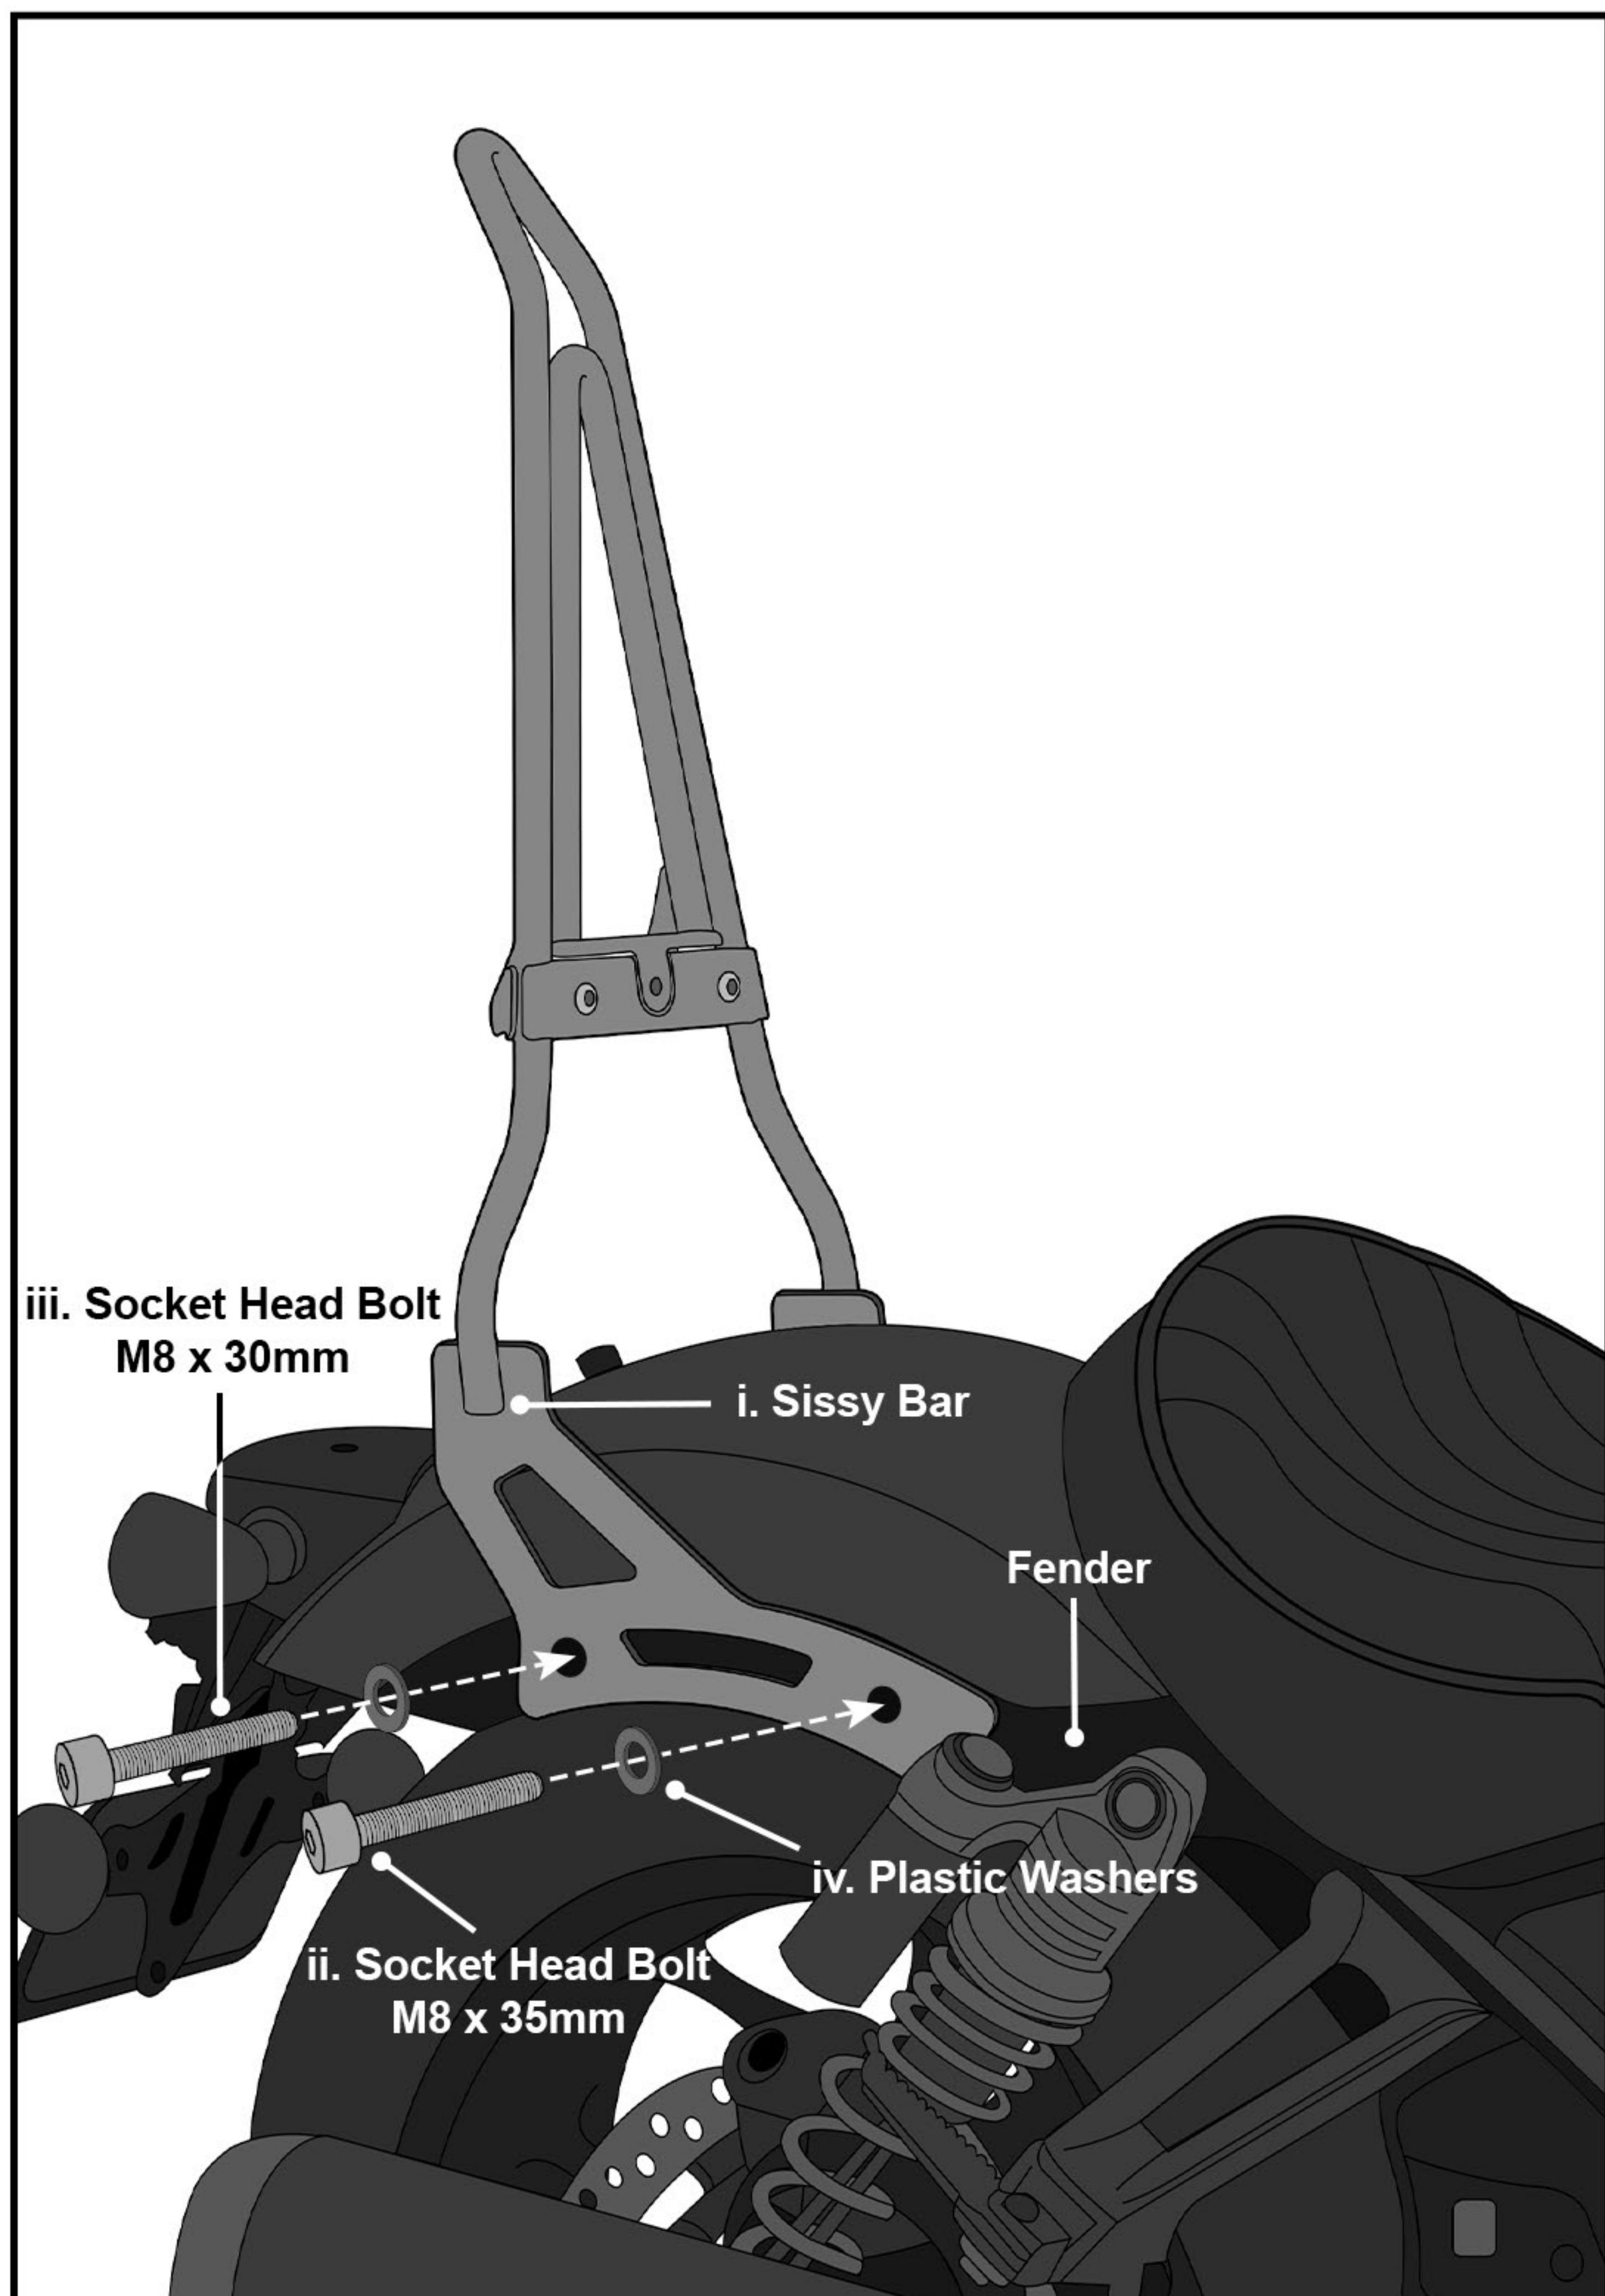

(Fig A) Sissy Bar Installed on Bike

Step 5

Tighten all 4 bolts.

Warnings !

- Do not install if you are confused about any of the installation steps.
- Regularly check bolts to ensure they are firmly in place.
- Viking Bags is not responsible for any damage or injury caused by improper use of any of the products.
- We recommend you consult a certified mechanic before installation.

Last Update: 11 December, 2024